


Verwendung von Rohrklemmen


Die gemachten Angaben sind Erfahrungswerte aus der Praxis.
 Im Einzelfall müssen die Abstände verringert werden.
 Armaturen prinzipiell beidseitig gesondert sichern.

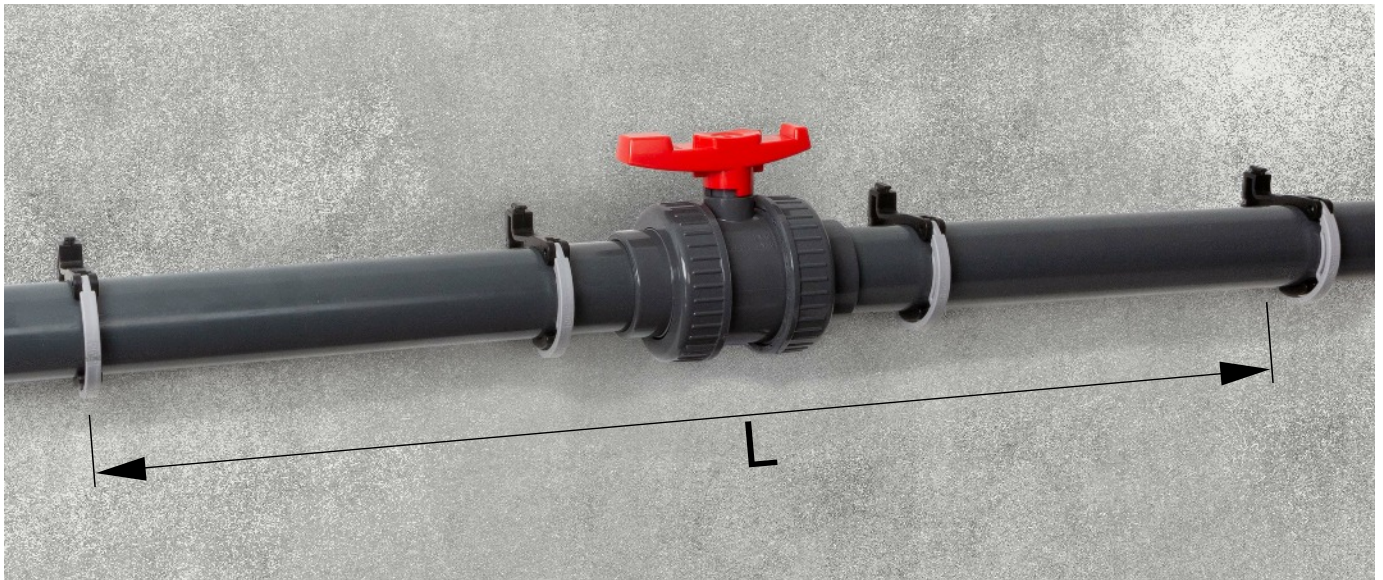

PVC-U PN 16	Rohr horizontal		Rohr vertikal
Rohr A-Ø	20°C	40°C	20°C - 45°C
	L (cm)	L (cm)	L (cm)
20	85	50	90
25	90	55	100
32	100	65	120
40	110	80	140
50	125	95	160
63	140	110	180
75	150	120	200
90	165	135	220
110	185	155	240
125	200	170	250
160	225	200	250
200	250	225	250

Use of pipe clamps

The information provided is based on practical experience.
 In individual cases, the distances may need to be reduced.
 Always secure valves separately on both sides.

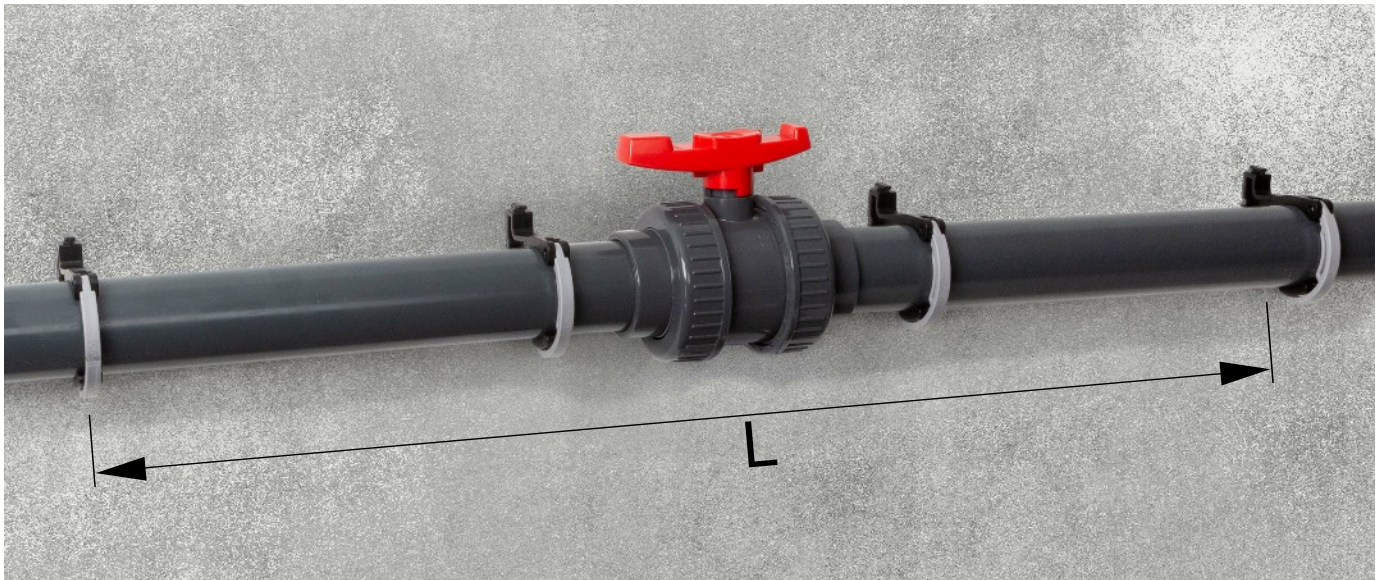

PVC-U PN 16	Pipe horizontal		Pipe vertical
Rohr A-Ø	20°C	40°C	20°C - 45°C
	L (cm)	L (cm)	L (cm)
20	85	50	90
25	90	55	100
32	100	65	120
40	110	80	140
50	125	95	160
63	140	110	180
75	150	120	200
90	165	135	220
110	185	155	240
125	200	170	250
160	225	200	250
200	250	225	250